



Centre-Surface Duplex



Italian Leader Worldwide
EUROMAC
SLITTERS REWINDERS

Euromac Costruzioni Meccaniche S.r.l. - Strada Statale 31 n.6 - 15030 Villanova Monf. - Italia
TEL. +39 0142.483195 - FAX +39 0142.483611 - www.euromacslitters.com • euromac@euromacslitters.com



TB-5S Centre-Surface Duplex


SLITTING - Slitting system with oscillating Razorblades and/or Shear-cut rotary blades
 • Knifeholders on shaft or linear bearing guides
 • Specific web path for Wrap-cut or Tangent-cut
 • Manual or semi-automatic or full automatic positioning of slitting blades.

UNWIND - Separate shaftless or shafted unwinder
 • Dancing roller for tension control
 • Pneumatic brake or electric motor
 • Automatic webguiding system.

WEB PATH - Underneath web path
 • Aluminum idler rollers
 • Driven main pull roll with own pressure roller or "S" wrap.

REWIND - Centre-surface rewind Duplex type
 • Double rewind stations driven by own motor and rewind shafts
 • Tension regulation by multiple systems for centre surface drive
 • Easy roll offloading by crane and possibility for manual or automatic trolleys.

AUTOMATION - PLC for all machine functions and controls
 • Touch screen digital operator panel
 • Modem for remote monitoring.

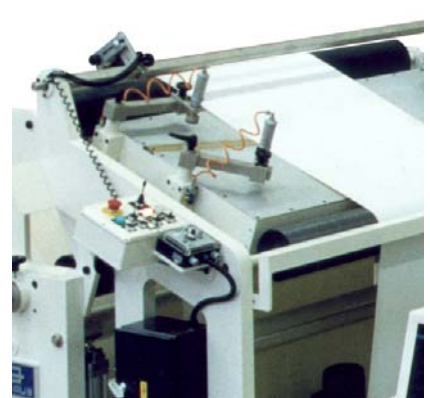

MAIN SPECIFICATION	Standard	Option
Maximum web widths	1.000 to 2.500 mm	(or Custom)
Maximum rewind diameter	800 to 1.000 mm	(or Custom)
Maximum unwind diameter	800 to 1.800 mm	(or Custom)
Webguide stroke	± 75 mm	(or Custom)
Core diameter	76, 152 mm	(or Custom)
Maximum working speed	500-800 m/min	(or Custom)
Web tension range	Customised	
Rewind system	Duplex Centre-surface	(Surface)
Slitting	Oscillating razors	(Shear)
Material	Monolayers (CPP, BOPP, BOPA, BOPP, PVC, PET), Laminates, Coextrusion films, Paper, Paper/PE, Aluminum laminates.	