




Centre-surface Compact

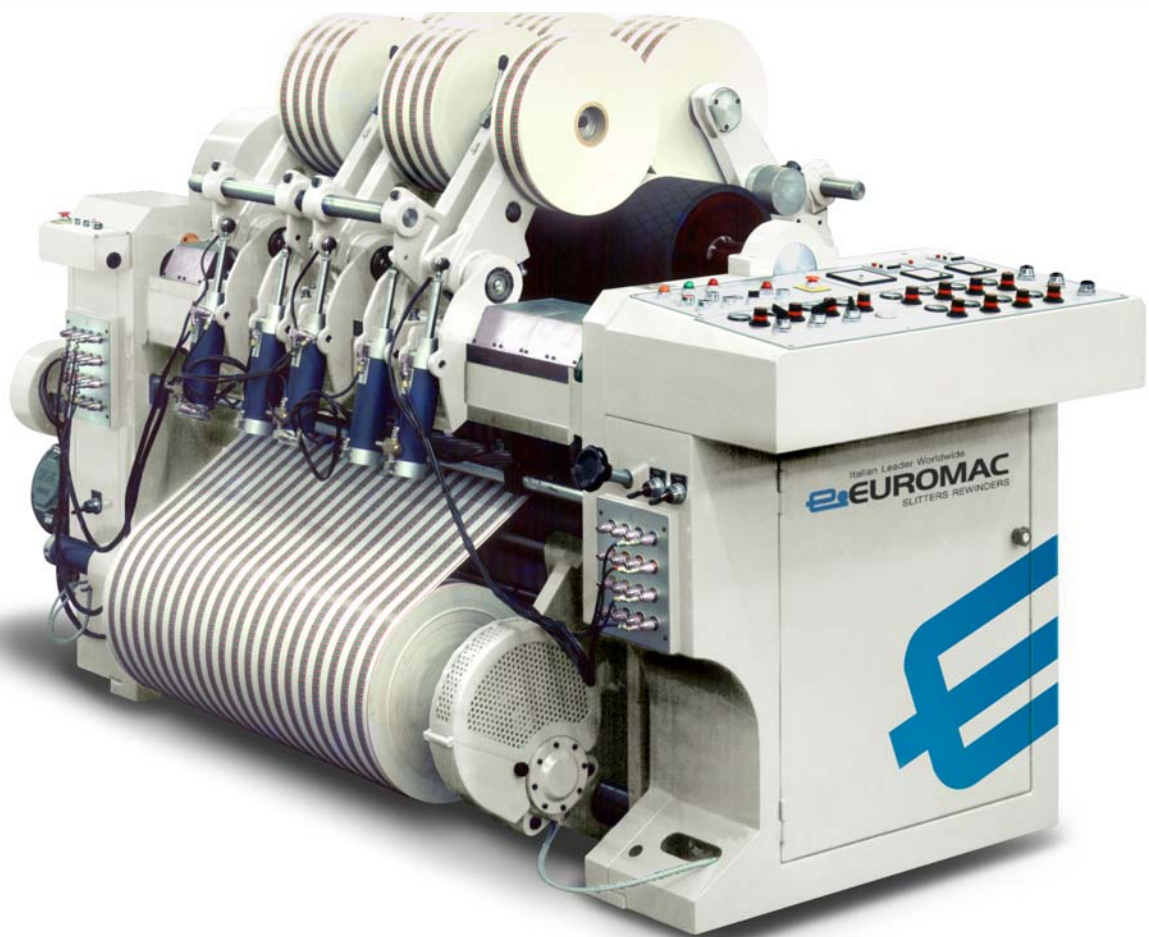

Italian Leader Worldwide
EUROMAC
SLITTERS REWINDERS

Euromac Costruzioni Meccaniche S.r.l. - Strada Statale 31 n.6 - 15030 Villanova Monf. - Italia
TEL. +39 0142.483195 - FAX +39 0142.483611 - www.euromacslitters.com • euromac@euromacslitters.com



Centre-surface Compact

Shear-cut rotary blades • Manual or semi-automatic positioning of slitting blades.

UNWIND - Separate shaftless or shafted unwinder • Dancing roller for tension control • Pneumatic brake or electric motor • Automatic webguiding system.


SLITTING - Slitting system at oscillating Razorblades and/or

WEB PATH - Compact webpath • Aluminum idler rollers • Driven main pull roll with own pressure roller or "S" wrap system.

REWIND - Centre-surface rewind • Independent rewind stations driven by own air friction clutches

• Tension regulation by multiple systems for centre-surface drive • Roll offloading manually or by crane.

AUTOMATION - PLC for all machine functions and controls • Touch screen digital operator panel • Modem for remote monitoring.

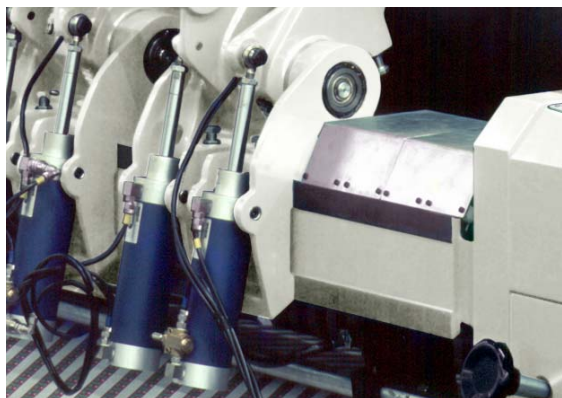

MAIN SPECIFICATION	Standard	Option
Maximum web widths	1.000 to 2.500 mm	(or Custom)
Maximum rewind diameter	600 mm	(or Custom)
Maximum unwind diameter	800 mm	(or Custom)
Webguide stroke	± 50 mm	(or Custom)
Core diameter	76, 152 mm	(or Custom)
Maximum working speed	400-600 m/min	(or Custom)
Web tension range	Customised	
Rewind system	Centre-surface	(surface)
Slitting	Oscillating razors	(Shear)
Material	Monolayers (CPP, BOPP, BOPA, BOPP, PVC, PET), Laminates, Coextrusion films, Paper, Paper/PE. Aluminum, Aluminum laminates.	